

DPW220

FULL-FEATURE MONITOR FOR MICROBULK AND SMALL BULK TANKS

The DPW220 provides top-of-the-line monitoring for industrial microbulk and small bulk tanks. Reduce delivery costs, prevent stock-outs, and provide customers with peace-of-mind.



FEATURES & BENEFITS



INTEGRATED WITH MAP APPLICATIONS FOR GEOGRAPHICAL INTERFACE AND MAPPING



PROGRAMMABLE OVER-THE-AIR



STANDARD AND CUSTOMIZABLE REPORTS TO TRACK INVENTORY AND VISUALIZE TRENDS



SOLUTION-SPECIFIC PRODUCT FOR SMALLER MICROBULK TANKS, INCLUDES A VARIETY OF SENSOR OPTIONS



EXCHANGE AND SHARE DATA WITH EXTERNAL SYSTEMS



EXTENSIVE NOTIFICATION AND ALERT CAPABILITY TO PREVENT RUN-OUTS



EFFICIENT, LOW-POWER DESIGN FOR LONG BATTERY LIFE



24/7 TECHNICAL SUPPORT AND TRAINING

HOW IT WORKS



HIGH-RELIABILITY SENSORS REGULARLY CHECK ASSET CONDITIONS



MEASUREMENTS AND ALERTS ARE COMMUNICATED TO SECURE CLOUD PLATFORM




VIEW READINGS, BUILD FORECASTS, AND CREATE REPORTS



SCHEDULE EFFICIENT DELIVERIES AND RESPOND QUICKLY TO CUSTOMER NEEDS

HAWKEYE-LITE

DPW220

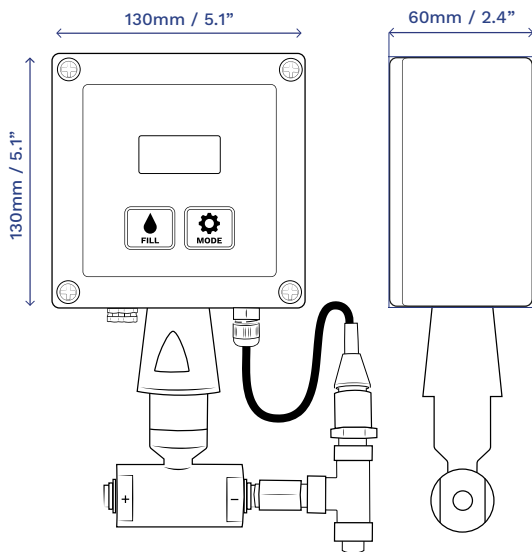

DIMENSIONS:

- 130mm x 130mm x 60mm
- 5.1" x 5.1" x 2.4"

RADIO:

- 4G LTE (3G or 2G fallback)

POWER INPUTS:

- Primary lithium battery

TEMPERATURE RANGE:

- -40° to 80°C
- -40° to 175°F

MATERIAL:

- Polycarbonate body,
- Polyurethane gasket

SENSOR & GAUGE INPUTS:

- Level (differential pressure)
- Pressure
- 1/4" NPT female threads

REPORTING SCHEDULE:

- Hourly log
- Transmit rate 1x per day (standard)
- Configurable for more frequent transmissions

BATTERY LIFE:

- Configuration dependent, up to 5 years with standard reporting schedule under optimal operating conditions


INTERNATIONAL PROTECTION MARKING:

- NEMA 4X, IP66

Note: May be manufactured under one or more of the following US Patents, 8840147, 8061021, 7399985


Anova Transcend™ Monitor All Your Assets in One Place.

Use the Anova Transcend platform to manage all of your monitored data from the DPW220.

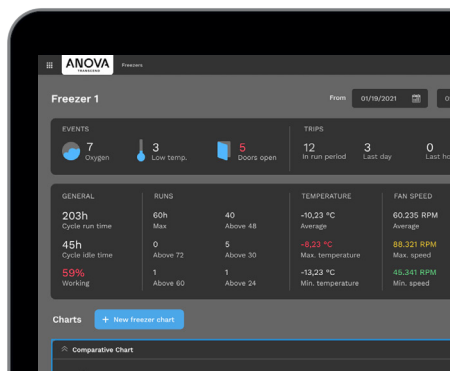


Beautiful Visualizations.

Simplifying the complex. Your data brought to life, for your operational ease.

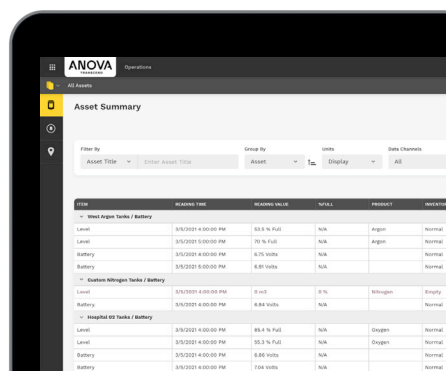

Instant Insight.

Make informed decisions and act, with confidence.

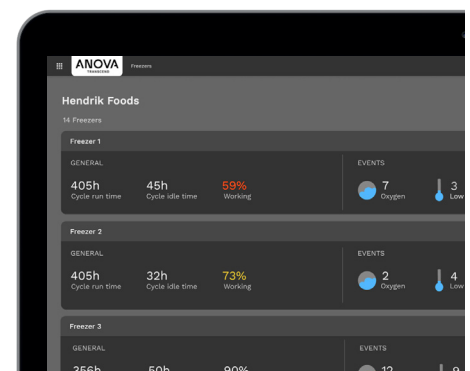

Dashboards, Your Way.

Customizable dashboards to focus on what matters most.

THE NEW HAWKEYE-LITE

Now available for purchase.

The Hawkeye-Lite is designed to enable telemetry on smaller tanks and to provide a cost-effective option for bulk tanks. It is suggested for sites which support the following:

- Single tank installations for level and pressure readings
- Non-rechargeable primary battery operation
- Transmission rates of either 1 or 2 times per day
- Battery life 3-5 years under optimal conditions, based on transmission rate
- All standard Hawkeye alert setpoints and usage rate alarms available



PART NUMBER:	DPW220-53xx3500-3500
PART DESCRIPTION:	WDP 2 Ch, Hawkeye-Lite, LTE 4G radio, 2 D-cell primary lithium battery, UD20 0-600", WIKA 0-600 psi
PRICE:	T
LEADTIME:	4 weeks
WARRANTY:	Warranty period and other terms are in accordance with the Linde-Anova Frame Agreement